


Διάφορα υδραυλικά εξαρτήματα  
**Various hydraulic attachments**

**505** Ωθηση-έλξη με φύλο ολίσθησης  
*Push-Pull with sheet retention*

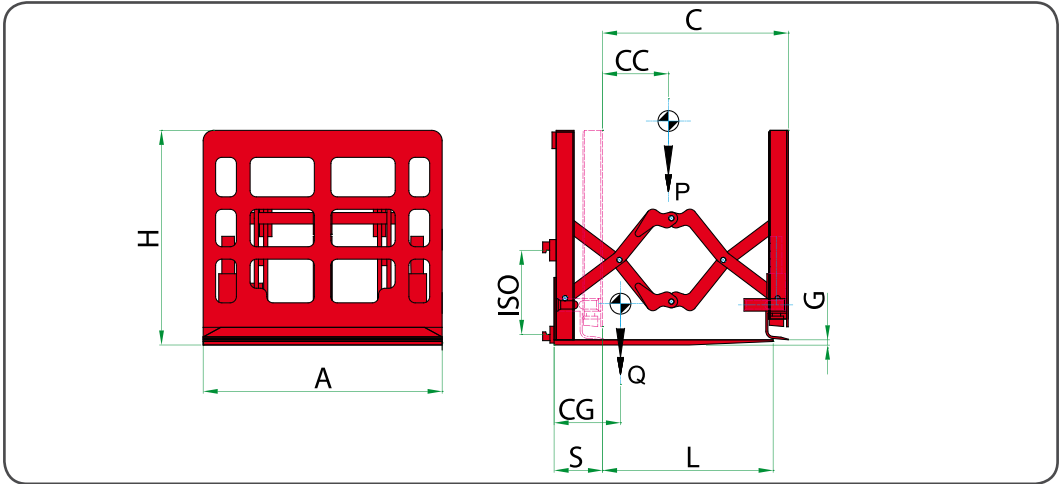

RIFERIMENTO	PORTATA ATTREZZATURA	BARICENTRO CARICO	CORSA	ALTEZZA	PIANALE DI CARICO			SPESSORE	BARICENTRO	PESO	
REFERENCE	ATTACHMENT CAPACITY	LOAD CENTRE	STROKE	HEIGHT	LOADING PLATE			THICKNESS	CENTER OF GRAVITY	WEIGHT	
ARTIKELNUMMER	TRAGFÄHIGKEIT DES ANBAUGERÄTS	LASTSCHWER- PUNKT	HUB	HÖHE	LADEPRITSCHEN			VORBAU- MAß	EIGENSCHWER- PUNKT	GEWICHT	
	P - Kg	CC - mm	C - mm	H - mm	A - mm	L - mm	G - mm	S - mm	CG - mm	Q - Kg	
<b>33B2J2A2001</b>	1000	550	II	1120	1000	1200	1070	20	270	235	650
<b>33B2J2A2002</b>	1000	650	II	1270	1100	1200	1220	20	270	245	720
<b>33B2U2A2001</b>	1500	550	II	1120	1000	1250	1070	25	275	240	760
<b>33B2U3A2002</b>	1500	650	III	1270	1100	1250	1220	25	275	250	830
<b>33B343A2001</b>	2000	550	III	1120	1000	1250	1070	30	300	270	870
<b>33B343A2002</b>	2000	650	III	1270	1100	1250	1220	30	300	280	970

Hydraulic functions required: 2 + 1 electric.

Max working pressure: 175 bar.

On request we can supply attachments with different specifications than those illustrated.

Semi-integral sideshift included in the price.