


474.160

ΛΑΒΙΑΔΑ ΓΙΑ ΕΝΑ Η ΔΥΟ ΒΑΡΕΛΙΑ
Drum clamp for one or two drums

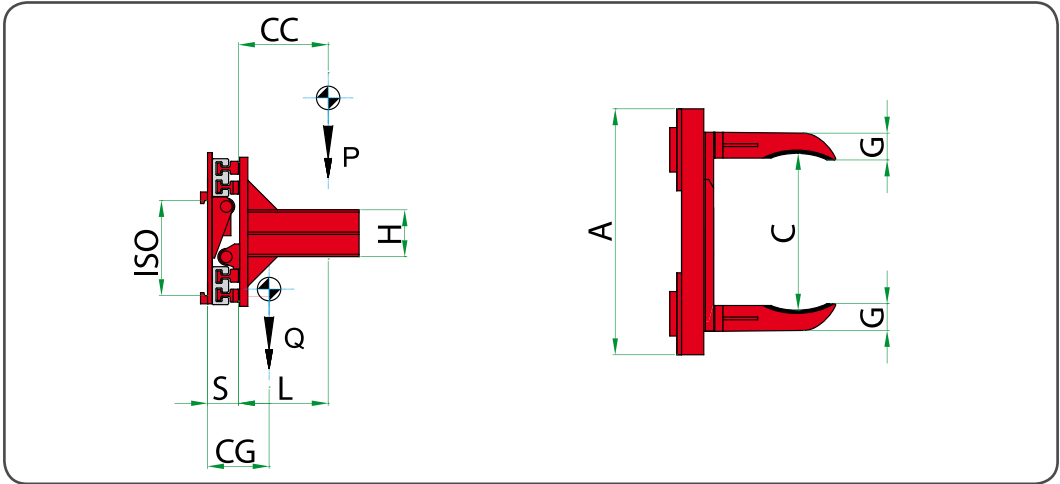

RIFERIMENTO	PORTATA ATTREZZATURA	BARICENTRO CARICO	LARGHEZZA TELAIO	APERTURA	DIMENSIONI GANASCE	SPESSORE	BARICENTRO	PESO	
REFERENCE	ATTACHMENT CAPACITY	LOAD CENTRE	ISO 2328 FEM A	FRAME WIDTH	OPENING RANGE	BLADES DIMENSIONS	THICKNESS	CENTER OF GRAVITY	WEIGHT
ARTIKELNUMMER	TRAGFÄHIGKEIT DES ANBAUGERÄTS	LASTSCHWER- PUNKT	KÖRPERBREITE	ÖFFNUNGSBEREICH	MAßE DER ARME	VORBAUMAß	EIGEN- SCHWERPUNKT	GEWICHT	
	P - Kg	CC - mm	A - mm	C MIN - mm C MAX - mm	GxHxL mm	S - mm	CG - mm	Q - Kg	
11L239G1C0001	800	500	I	950	490 1730	100x200x330	109	102	230
11L23AQ2C0001	1200	500	II	950	490 1730	100x200x330	109	102	230
11L23BE2C0001	1400	500	II	950	450 1600	100x200x330	137	109	316

Hydraulic functions required: 1.
Max working pressure: 175 bar.
On request we can supply attachments with different specifications than those illustrated.
Pressure relief valve, non-return valve and regenerative valve are supplied as standard.
Upon request supplied with semi-integral side-shift or integral sideshift.