


Τηλεσκοπικά πιρούνια Telescopic forks

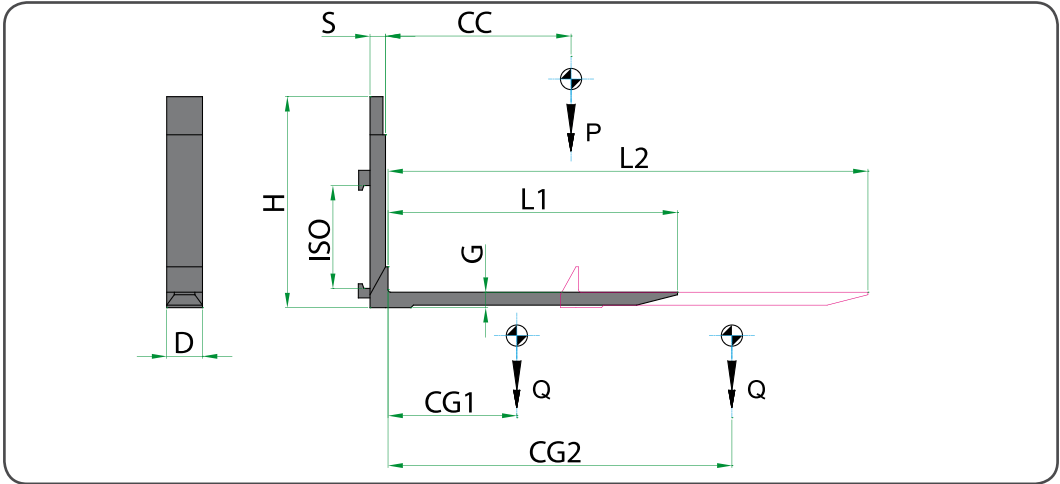

RIFERIMENTO	PORTATA ALLA COPPIA	BARICENTRO CARICO	SEZIONE FORCA	ALTEZZA	LUNGHEZZA	SPESORE	BARICENTRO	BARICENTRO	PESO ALLA COPPIA			
REFERENCE	CAPACITY PER PAIR	LOAD CENTRE	ISO 2328 FEM A	FORK SECTION	HEIGHT	LENGTH	CENTER OF GRAVITY	CENTER OF GRAVITY	WEIGHT PER PAIR			
ARTIKELNUMMER	TRAGFÄHIG- KEIT PRO PAAR	LASTSCHWER- PUNKT	GABELQUERSCHNITT	HÖHE	LÄNGE	VORBAUMABß	EIGEN- SCHWERPUNKT	EIGENSCHWER- PUNKT	GEWICHT JE PAAR			
	P - Kg	CC - mm	D - mm	G - mm	H - mm	L1 - mm	L2 - mm	S - mm	CG1 - mm	CG2 - mm	Q - Kg	
53UFA2A049	2500	500	II	132	61	760	900	1450	50	239	377	160
53UFA2A046	2500	500	II	132	61	760	1000	1650	50	279	447	172
53UFA2A055	2500	500	II	132	61	760	1150	1900	50	336	535	190
53UFA2A047	2500	500	II	132	61	760	1250	2100	50	374	603	201
53UFA2A048	2500	500	II	132	61	760	1350	2300	55	412	672	212
53UHY3A001	3500	500	III	155	68	810	900	1400	60	242	351	203
53UHY3A002	3500	500	III	155	68	810	1000	1600	60	278	412	217
53UHY3A003	3500	500	III	155	68	810	1150	1850	60	336	495	238
53UHY3A004	3500	500	III	155	68	810	1250	2050	60	373	557	252
53UHY3A005	3500	500	III	155	68	810	1350	2250	60	412	623	266
53UKQ3A001	4500	500	III	165	68	810	900	1350	60	244	337	216
53UKQ3A002	4500	500	III	165	68	810	1000	1550	60	285	404	232
53UKQ3A003	4500	500	III	165	68	810	1150	1800	60	340	484	254
53UKQ3A004	4500	500	III	165	68	810	1250	2000	60	378	546	269
53UKQ3A005	4500	500	III	165	68	810	1350	2200	60	417	610	284
53ULM4A001	5000	600	IV	180	85	980	1000	1500	70	250	332	312
53ULM4A002	5000	600	IV	180	85	980	1150	1750	70	304	406	341
53ULM4A003	5000	600	IV	180	85	980	1250	1950	70	342	463	360
53ULM4A004	5000	600	IV	180	85	980	1350	2150	70	378	520	378
53ULM4A005	5000	600	IV	180	85	980	1450	2350	70	417	580	397

Hydraulic functions required: 1.
 Max working pressure: 175 bar.
 On request we can supply attachments with dif-
 ferent specifications than those illustrated.
 Flow divider valve is supplied as standard.

Τηλεσκοπικά πιρούνια
Telescopic forks

