


918

ΔΙΑΧΕΙΡΙΣΗ ΤΡΙΩΝ ΠΑΛΕΤΩΝ
Triple fork positioner

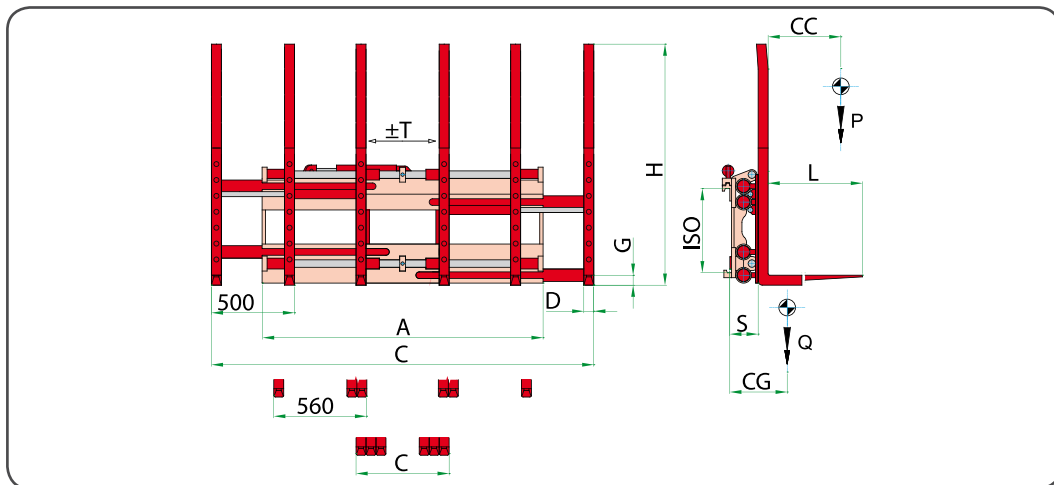

RIFERIMENTO	PORTATA ATTREZZATURA	BARICENTRO CARICO	LARGHEZZA PIASTRA	APERTURA	FORCHE	CORSA	SPESORE	BARICENTRO	PESO		
REFERENCE	ATTACHMENT CAPACITY	LOAD CENTRE	ISO 2328 FEM A	CARRIAGE WIDTH	OPENING RANGE	FORKS	STROKE	THICKNESS	CENTER OF GRAVITY	WEIGHT	
ARTIKELNUMMER	TRAGFÄHIGKEIT DES ANBAUGERÄTS	LASTSCHWER- PUNKT		KÖRPER- BREITE	ÖFFNUNGSBEREICH	GABELZINKEN	SCHUB	VORBAU- MAß	EIGENSCHWER- PUNKT	GEWICHT	
	P - Kg	CC - mm		A - mm	C MIN - mm C MAX - mm	DxGxL mm	H mm	T - mm	S - mm	CG - mm	Q - Kg
15SH33A1001	3000	600	III	1630	560 2285	60x50x1150	1460	100	173	235	690
15SH33A1002	3000	600	III	1795	560 2450	60x50x1150	1460	100	173	233	730
15SJ53A1001	3600	600	III	1630	560 2285	60x60x1150	1460	100	173	240	785
15SJ53A1002	3600	600	III	1795	560 2450	60x60x1150	1460	100	173	237	810
15SJ53A1003	3600	600	III	2285	560 2940	60x60x1150	1460	100	173	225	930

Hydraulic functions required: 2.
Maximum working pressure: 200 bar.
On request we can supply attachments with different specifications than those illustrated.
The bolt-on forks are included in the price.