


474.141

ΛΑΒΙΑΔΑ ΤΣΙΜΕΝΤΟΛΙΘΩΝ ΜΕ ΕΙΣΩΤΙΚΑ ΜΠΡΑΤΣΑ
Block clamp with compensating arms

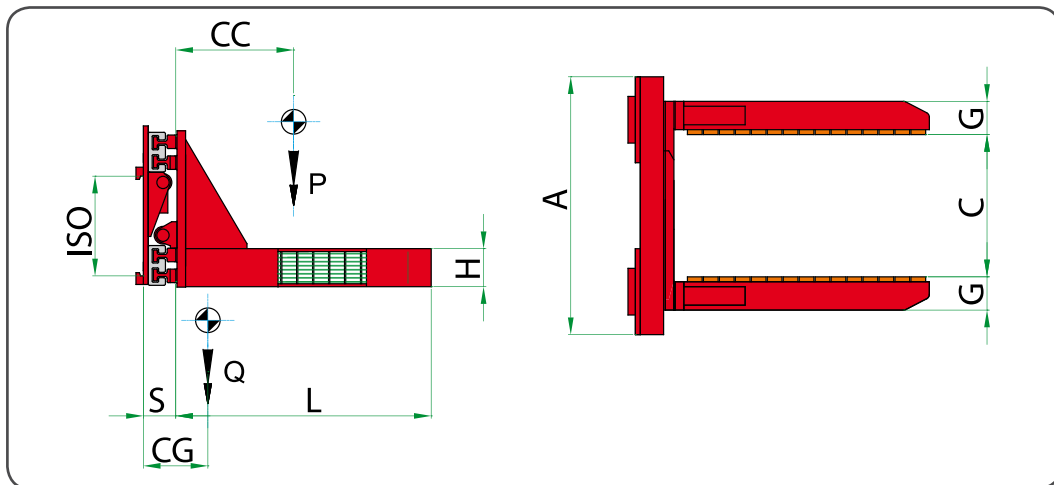

RIFERIMENTO	PORTATA ATTREZZATURA	BARICENTRO CARICO	ISO 2328 FEM A	LARGHEZZA TELAIO	APERTURA		DIMENSIONI GANASCE	SPESSORE	BARICENTRO	PESO
REFERENCE	ATTACHMENT CAPACITY	LOAD CENTRE		FRAME WIDTH	OPENING RANGE		BLADES DIMENSIONS	THICKNESS	CENTER OF GRAVITY	WEIGHT
ARTIKELNUMMER	TRAGFÄHIGKEIT DES ANBAUGERÄTS	LASTSCHWER- PUNKT		KÖRPERBREITE	ÖFFNUNGSBEREICH		MAßE DER ARME	VORBAU- MAß	EIGENSCHWER- PUNKT	GEWICHT
	P - Kg	CC - mm		A - mm	C MIN - mm	C MAX - mm	GxHxL mm	S - mm	CG - mm	Q - Kg
11L20BE2A0001	1400	500	II	1050	400	1750	120x150x1095	137	252	405
11L20BE2A0002	1400	500	II	1050	400	1750	120x150x1295	137	306	422
11L20CG2A0001	1700	500	II	1050	400	1750	120x150x1095	137	252	405
11L20CG2A0002	1700	500	II	1050	400	1750	120x150x1295	137	306	422
11L20D62A0001	1900	500	II	1150	370	1820	125x170x1100	137	268	465
11L20D62A0002	1900	500	II	1150	370	1820	125x170x1300	137	327	493
11L20EY2A0001	2400	500	II	1150	370	1820	125x170x1100	137	268	465
11L20EY2A0002	2400	500	II	1150	370	1820	125x170x1300	137	327	493
11L20G03A0001	2700	500	III	1100	390	1760	125x170x1110	157	260	547
11L20G03A0002	2700	500	III	1100	390	1760	125x170x1310	157	311	573

Hydraulic functions required: 1.

Max working pressure: 175 bar.

On request we can supply attachments with different specifications than those illustrated.

Pressure relief valve, non-return valve and regenerative valve are supplied as standard.

Upon request supplied with semi-integral side-shift or integral side shift.